


QUALI STAR™

Discover the White / Green film
The 7 advantages for silage conservation



Special for professionals:
300 metre Reels

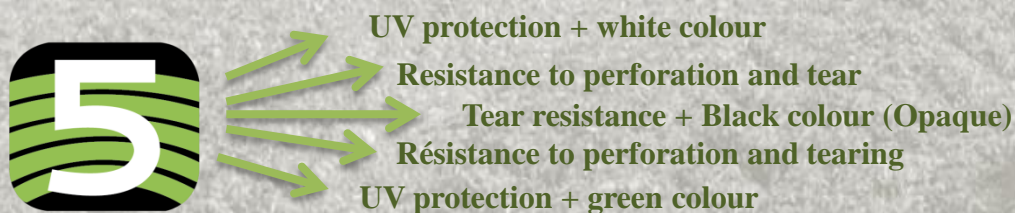

A technological innovation 5 layers





The most resistant film in our range

> 900g on film, 300g on fold (film from 10m to 18m wide)

Guaranteed thickness of 115μ

(selon EN ISO 7765-1 : 2004 méthode A)



Impermeability to the air

< 250 cm³/m²/24h

(selon DIN 53380-3 : 1998-07 mit Oxygène; +23°C; 0,2 bar)



Food contact guarantee

Totally innocuous film, 100% virgin raw material film



Adaptation to forage

Less air trapped under the film



Easily placed

Thanks to a special folding process



UV Protection

QUALISTAR™ has UV protection on both sides
18 months class S2 (≤130Kly)



Eco Conception

QUALISTAR™ has a positive impact on the carbon footprint
Reducing the consumption of fossil materials.



1 roll has 300m / pallet

Width (m)		8	10 – 12 – 14 - 16	18 -20	Test Methods
Thickness		115 μ			ISO4591 et ISO4593
Breaking strength	SL	21MPa	21MPa	21MPa	EN ISO 527-3 EN ISO 527-1
	ST	21MPa	21MPa	21MPa	
Elongation at break.	SL	450%	450%	450%	EN ISO7765-1 : 2004 méthode A
	ST	600%	600%	600%	
Dart Test	Surface	500g	900 g	500 g	EN ISO7765-1 : 2004 méthode A
	Fold	250 g	500 g	250 g	

Our Commitments.

This commercial file has no contractual validity. The information and photographs it contains do not commit us, except for the technical specifications assessed according to the EN13207 standard.

Only our F.I.C.C.U. : Information Sheet, Advice and Instructions for Use (catalogue products) and / or our specifications (specific products) determines the content and limits of our commitments concerning the technical characteristics of our products.

Our F.I.C.C.C.U. (Information Sheet, Tips and Instructions for Use) can be obtained from your supplier.

To obtain it you can also send us an email to: agricole@barbiergroup.com or visit our website www.barbiergroup.com

Our Recommendations

Before ordering or using our film, we recommend:

- Take note of our information sheet, tips and instructions for use
- Talk to your supplier about our product and the particular conditions of its exploitation.
- The use of tyres as ballast is prohibited, use the weight bags provided for this use. The use for protection of straw should be avoided.