

Our commitments

This commercial sheet has no contractual value. Information and photos we provide do not commit us, except technical specifications in accordance with the NF EN13206 standard.

Only our F.I.C.C.U. : Information, Tips and Operating Instructions Sheet (products on stock) and/or our specification note (specific products) determines the content and the limits of our commitment concerning the technical characteristics of our products.

Our F.I.C.C.U. (Information, Tips and Operating Instructions Sheet) can be obtained from your supplier.

You can get this F.I.C.C.U. by writing to the following email address: agricole@barbiergroup.com or on our website www.barbiergroup.com

Our recommendations

You should never order or use our film:

- without taking into account our Information, Tips and Operating Instructions Sheet.
- without having talked with your supplier about our product and about the specific conditions of your cultivation.

Serving the agricultural sector for over 60 years, the BARBIER Group offers a complete range of films specialized in plasticulture and at the state of art of technology.

The BARBIER Group is today the leading French extruder and one of the main European extruders.

The BARBIER Group is working in close collaboration with official institutes (INRA, CEMAGREF, CTIFL, test stations, Chambers of Agriculture...).



LA GUIDE – BP 39
F 43602 SAINTE – SIGOLENE CEDEX
PHONE : + 33.(0)4.71.75.11.11
FAX + 33.(0)4.71.66.15.01
Email : barbier@barbiergroup.com
Website : www.barbiergroup.com

Groupe
Barbier
Plastic solutions

OPALIN[®] PRO-SR-I 100µ/400g

DIFFUSIONG THERMAL FILM EN13206 CLASS B



Product *advantages*

- ⇒ Special for red fruits
- ⇒ High light transmission
- ⇒ High Thermal Efficiency
- ⇒ Diffusing
- ⇒ Enhanced resistance to phytosanitary products (sulfur and halogenated products)



Excellent ratio agronomic qualities / price m²



Groupe
Barbier
Plastic solutions

OPALIN® PRO-SR-I is a diffusing thermal film that was specifically developed to protect your red fruits crops.



Warning : the use of OPALIN® PRO SR-I is not recommended in low brightness areas or / and on crops that need a lot of light.



Mechanical Resistance

Thanks to the choices of high quality raw materials and to our 3 and 5 layers manufacturing processes, OPALIN@PRO-SR-I complies with the EN13206 standard requirements.



Lifespan: 1 year to 160 Kly/year

Film Class B



Enhanced pesticide resistance

sulfur and halogenated : 1500 ppm of sulfur and 100 ppm of chlorine



High light transmission

The film allows more than 90 % of visible light to pass.
Yields are increased (better photosynthesis).



Diffuse light

Light diffusion prevents large temperature variations and the burns on the leaves.



High thermicity

The film keeps the night the heat accumulated during daytime.
Earliness is enhanced, the plant is less stressed.



Anti-drop effect option available

OPALIN@PRO-SR-I is available in Anti-Drop version.




Easy unfolding for large widths

Technical Specifications (for a new film)

	OPALIN® PRO SR-I	Requirements EN 13206	Test method
Class of film	B		EN13206 (§ 6)
Thickness	100 µ / 400 g		ISO4591 et ISO4593
Global Light Transmission	> 90%	≥ 85%	ASTDM 1003
Haze	40 - 50%	≥ 25%	ASTDM 1003
Lightness	> 30%		ASTDM 1003
Thermal efficiency (IR)	≥ 75%	≥ 70%	EN 13206 (§ 8.8)


Expected lifetime depending on the geographic area

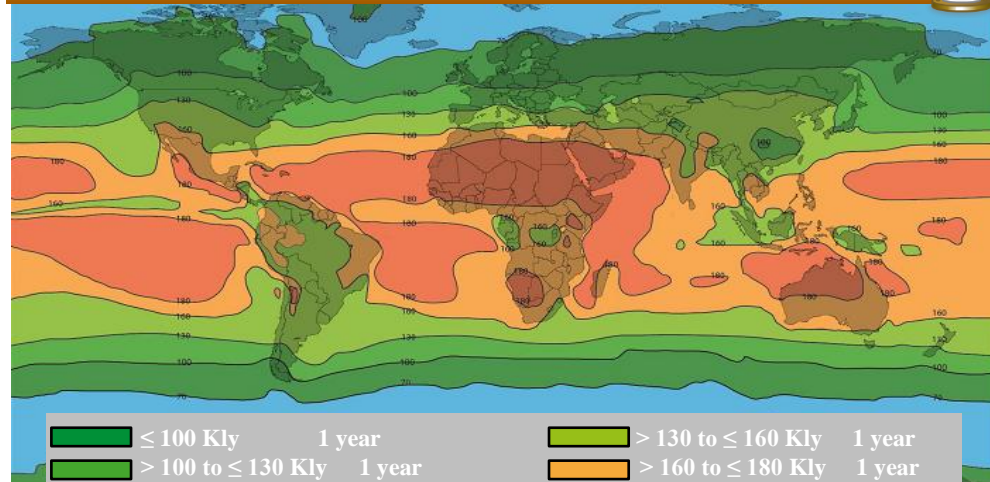

For more information concerning our greenhouse films please ask for our INFORMATION, TIPS AND OPERATING INSTRUCTIONS SHEET to your distributor or to the email address: agricole@barbierrgroup.com or on our website www.barbierrgroup.com.

This map has only an indicative value. To know the exact exposure to solar radiation for your area of use, please consult your local weather station.


Our foldings and options



1m to 4m



4m to 11m



10m to 16m

We can cut our films on demand.

Individual cuts for covering in the length (tunnel, span, multi-span, canarian).

For more information, please contact us.